


Suffolk Thumb Latch, Yard Swing

INSTALLATION INSTRUCTIONS



Please review ALL diagrams and instructions in full prior to beginning installation.
Use this instruction in place of those inside of the hardware box.

LATCH INSTALLATION

Install Latch after gate and hinges are installed.

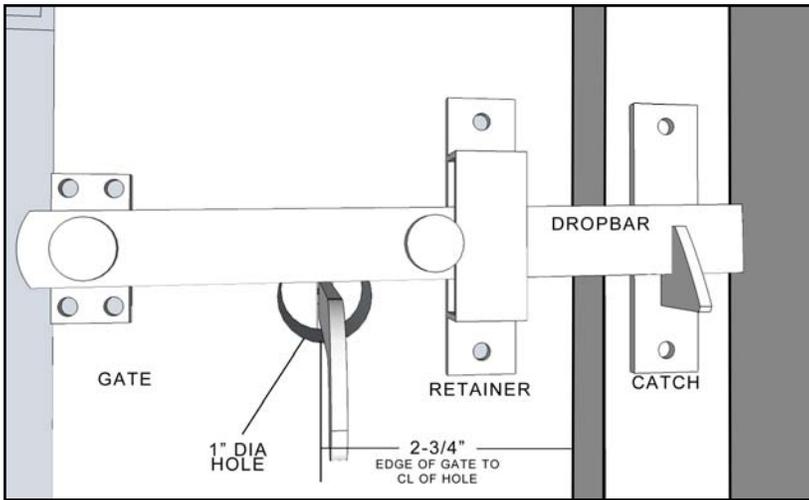

- 1) This latch requires a minimum of 5.5" horizontal mounting surface. As all installations will be different, please pay special attention to layout prior to drilling any holes.
- 2) With gate in closed position, determine appropriate latch height location. Drill a 1" diameter hole through the gate at the desired location. It is best to drill from the latch bar side because any tear out will be hidden when the thumb plate is installed. The opposite side of the hole is visible so a clean cut is most attractive.
- 3) Once the hole has been drilled, place the thumb plate on the gate so that the bottom of the bar that passes through the gate is 1/8" off the bottom of the 1" hole. Install with 6 screws provided. Raising it up 1/8" allows free movement even if the wood expands.
- 4) Next, place the latch bar level so the bottom of the latching bar rests on top of the protruding thumb bar. Install with 4 screws provided.
- 5) Place the catch on the post so the latching bar is level while in the resting position. Install with 2 screws provided.
- 6) Finally, place the bar retainer over the latching bar and install level with the catch you put on the post in step 5. Install with 2 screws provided.

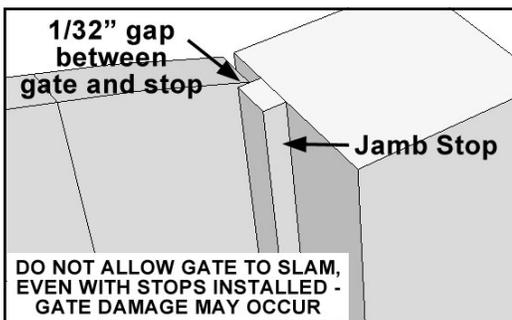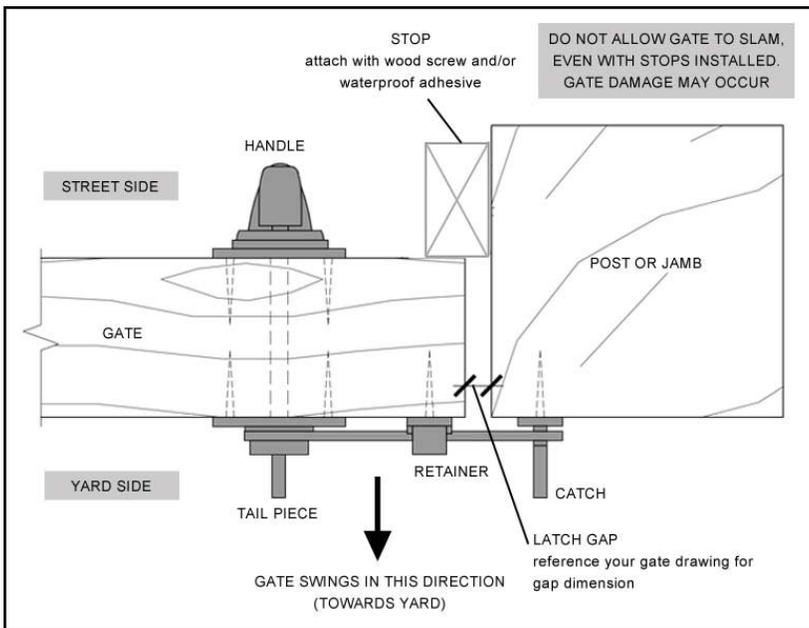

STOP INSTALLATION

Failure to install gate stops will void warranties.

- 1) Cut stop to be at least as long as the gate's edge height.
- 2) Mount stops to posts (or jambs, if applicable) using screws and/or weatherproof wood glue (such as Titebond III). Position stop with 1/32" gap between face of gate and stop when gate is closed.